

# RFID Readers and Tags

## Introduction:

GP Series RFID readers are high performance proximity readers featuring long range and small dimensions. The readers run from any voltage from 5 to 12.5V DC and feature high read range at as low as 5 volts making it ideally suited to a wide variety of applications, particularly access control. The same basic unit can be configured to output most of the common interface formats, including Wiegand, Magstripe, Clock / Data and RS232 serial ASCII output, making it easy to upgrade existing installations.

## Features:

- ☆ **Wide Voltage range**
- ☆ **Potted for environmental protection**
- ☆ **Externally programmable interface**
- Weather resistant

## Ordering information:

- GP8 – Small reader module for OEM applications
- GP20 – Up to 20 cm read range, wall-mounting
- GP30 – Up to 30 cm read range, wall-mounting
- GP60A – Up to 60 cm read range, wall-mounting
- GP90A – Up to 90 cm read range, wall-mounting


## Specifications:

Power Requirements	5 ~ 12.5 V DC regulated, linear
Interfaces	Wiegand, MSR ABA Track2 or RS232
Read Range	<ul style="list-style-type: none"> <li>➢ GP8: Up to 7 cm without external antenna with ISO card; up to 30 cm with proper external antenna</li> <li>➢ GP20: Up to 13 cm at 5V with ISO card; up to 20 cm at 12.5V</li> <li>➢ GP30: Up to 20 cm at 5V with ISO card; up to 30 cm at 12.5V</li> </ul>
Frequency	125KHz, ASK
Format	64 bits, Manchester coding
Transponder	Read only
Dimensions	GP8 – 41 x 24 x 10 mm GP20 – 78 x 43 x 15 mm GP30 – 104 x 63 x 20 mm
Temperature Range	Readers: -25 ~ 65°C Transponders: -55 ~ 80°C

## Ordering information for Transponders:

- CFR01 – 86 x 55 x 0.8 mm ISO card
- CFR03 – 86 x 55 x 2 mm Clamshell card
- TAG52 – Disc with diameter 52 mm, 8 mm thickness
- TAG50A – Disc with diameter 50 mm, 2 mm thickness (**Grey**)
- TAG25 – Disc with diameter 25 mm, 4 mm thickness
- TAG22 – Disc with diameter 22 mm, 4 mm thickness
- TAG25K – Key chain, W31 x H41 x D5 mm
- TAG20K – Tear drop key chain W30 x H45.2 x D5.1mm


※ **Specification is subject to change without notice.**

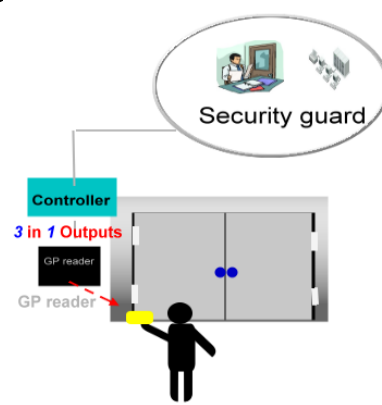

Security guard


Controller  
3 in 1 Outputs  
GP reader  
GP reader

Reader options



Reader Module  
GP20/30 Square housing  
GP20N/GP30N Aerodynamic housing

Distance options : 20 - 90 cm available

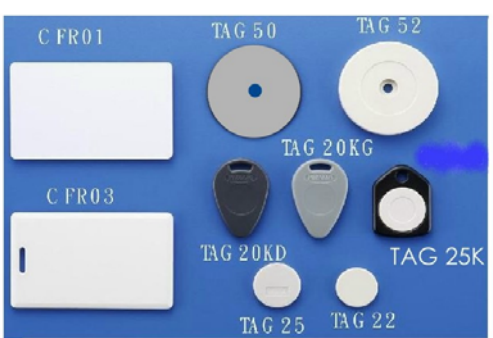



CoreRFID Ltd. Dallam Court, Dallam Lane, Warrington, WA2 7LT  
T: +44 (0)845 071 0985 F: +44 (0)845 071 0989  
www.CoreRFID.com www.rfidshop.com