

Container Trak



The new Container Trak provides industry-leading performance and up to a 20-meter read range. The extremely durable tag is IP68-rated, making it suitable for harsh outdoor environments as well as exposure to water and contaminants.



Multi-Surface
on/off metal



Superior read range



High performance
yet cost-effective



IP68



Various easily
mounting systems



Performance Characteristics

Read range (On metal) ¹	Up to 65.6 ft (20 m)
Read range (Off metal) ¹	Up to 49.2 ft (15 m)
Polarization	Linear
Attachment	Rivet hole, \varnothing 1/4" M6, Adhesive (optional), Cable tie, Metal Insert (optional)

1. Fix reader

Functional Specifications

RF protocol	EPC global Class 1 Gen2
Frequency	902-928 (US) ; 865-868 (EU)
IC type (chip) ¹	Impinj Monza R6-P
Memory ²	128-EPC bits, 48-bit unique TID, 512-bit user memory Max user memory 64-bit, 48 TID, 96 EPC bits
Material	High-performance engineered polymer


1. The chip data retention is up to 50 years, based on chip operating under general environment conditions.

2. EPC and User Memory can be re-programmed, password protected, or permanently locked. TID is locked and unique at the point of manufacturing.

- Automated Inventory
- Outdoors Assets Tracking
- Industrial Supply Chain Management
- RTI Management

[LEARN MORE >](#)

Radiation Pattern

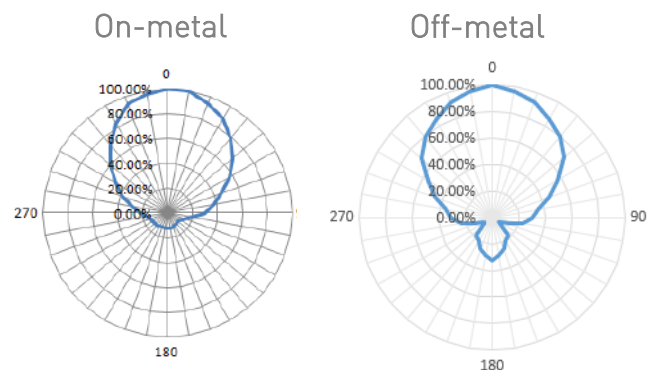

Environmental Specifications

Operational temperature	-40°C to +85°C
Survival temperature	-40°C to +85°C (long term)
IP rating	IP68
Compression strength	29 psi (200 kPa)
Shock (drop)	3 ft (1 m) to concrete/granite
Vibration	MIL-STD-810G

Industry Compliance

RoHS	EU Directive 2011/65/EU
CE	Yes
ATEX/IECEX	Compliant
Warranty	1 year


Order Information

X0360-US100-R6P	Container Trak US
X0360-EU100-R6P	Container Trak EU
Optional service	Encoding / Printing




Product Dimensions and Weight

Dimensions (in)	5.46 x 1.65 x 0.47
Tolerance	+/- 0.02
Dimensions (mm)	138.8 x 42 x 12
Tolerance	+/- 0.5
Weight	1.45 oz (41 g)

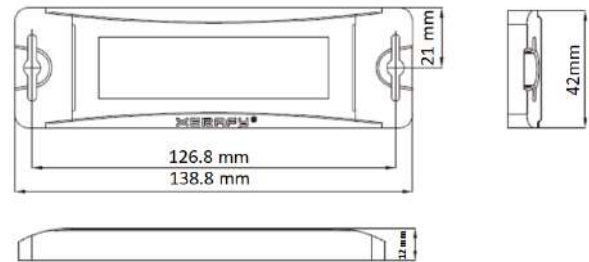

Installation Instructions

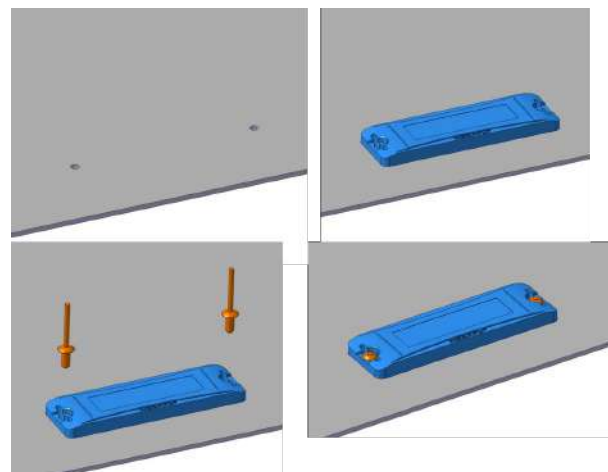

Instructions for optimal performances:

1. Drill two holes on the subject metal surface. (ø 1/4" M6, pitch: 126.8mm)
2. Insert two ø5.0 mm (recommended size) rivets on the tag.
3. Fix the tag on the metal surface with a rivet gun.

About Xerafy

Xerafy designs and manufactures the world's toughest RFID tags to power Industrial IoT applications in Aerospace, Oil & Gas, Automotive, Healthcare and Manufacturing.

For Product inquiries: sales@xerafy.com
Singapore | China | US | UK

[GO TO WEBSITE >](#)